

## ◆ 胶带输送机 Belt Conveyors



我公司生产的带式输送机可用来输送松散物料或成件物品，可单台输送，也可多台组成或其他输送设备组成水平或倾斜的输送系统，以满足不同布置形式的作业线需要。

Built to match the superior strength and long service life of Zenith crushers, grinders, and pulverizers as proved in industry's most demanding materials handling, Zenith belt conveyors can withstand repeated severe impact loads over long operating lives.


The belt conveyors produced by Zenith consist of standard parts; they are big in transfer quantity, advanced and simple in structure, easy to maintain. They are widely used in mining, metallurgical and coal industry to transfer sandy or lump material, or packaged material. According to different transfer requirements, the transfer system can be only one belt conveyor or multi-conveyers, or combined with other transfer equipment. The belt conveyors can be in horizon or in slope to meet the needs of different transfer lines.

规格与性能参数表 Specifications:

胶带宽度 Belt Width (mm)	输送长度/功率 Belt Length (m) / Power (kw)	输送速度 Belt Speed (m/s)	输送量 Capacity (t/h)
400	≤12/2.2    12~20/2.2~4	20~25/3.5~7.5	1.25~2.0    30~60
500	≤12/3    12~20/3~5.5	20~30/5.5~7.5	1.25~2.0    40~80
650	≤12/4    12~20/4~5.5	20~30/5.5~11	1.25~2.0    80~120
800	≤10/4    10~15/4~5.5	15~30/5.5~15	1.25~2.0    120~200
1000	≤10/5.5    10~20/5.5~11	20~40/11~22	1.25~2.0    200~320
1200	≤10/7.5    10~20/7.5~15	20~40/15~30	1.25~2.0    290~480

注：各项参数及外形若有变更，依发货时随机附带的的使用维护说明书为准。  
Notes: If there is any modification, all parameter and overall dimension are subject to the operating instructions.

## 机制砂生产线示意图 Schematic Drawing of Sand Making Production Line

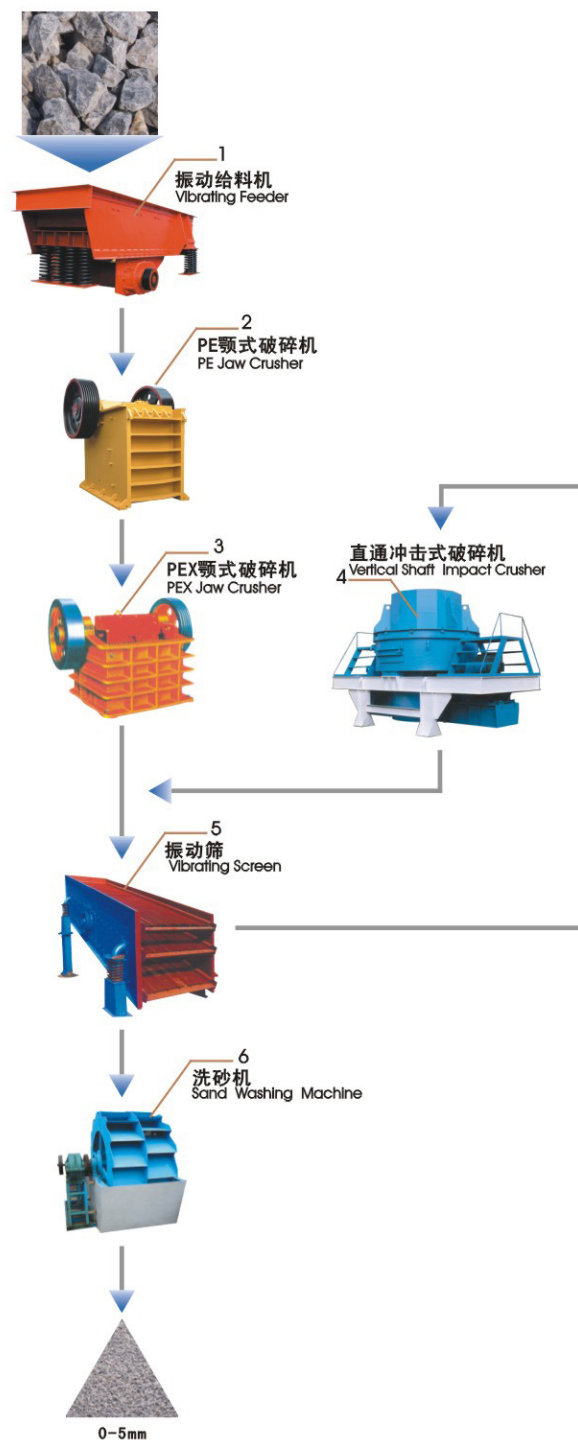

## 石料生产线示意图 Schematic Drawing of Stone Production Line

